# MODULAR CONNECTORS

## CL 222 TM

### Plug for copper foil, stranded wire flat type cable


Material · Finish

Part name	Material	Finish
Plug case	Polycarbonate	Clear
Terminal	Phosphor Bronze	Gold plated


	Applicable Cable
Conductor diameter	Copper foil or AWG # 26
Insulator diameter	0.9- 1.0

#### **Electrical Performance**

Item	Condition	Specification
Current rating	Per pin	0.5A
Voltage rating	Per pin	125V AC
Insulation Resistance	100V DC	100 M Min.
Withstanding Voltage	1 minute	500V r.m.s AC

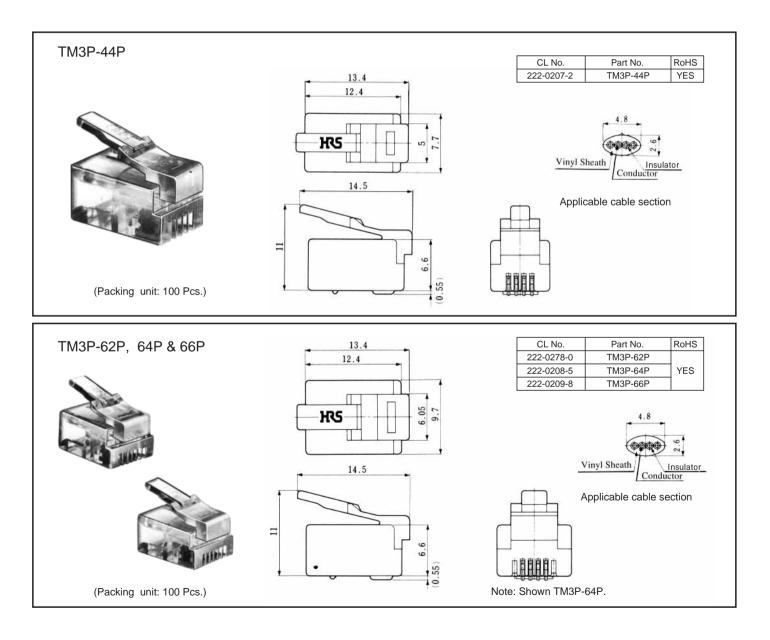

# MODULAR CONNECTORS

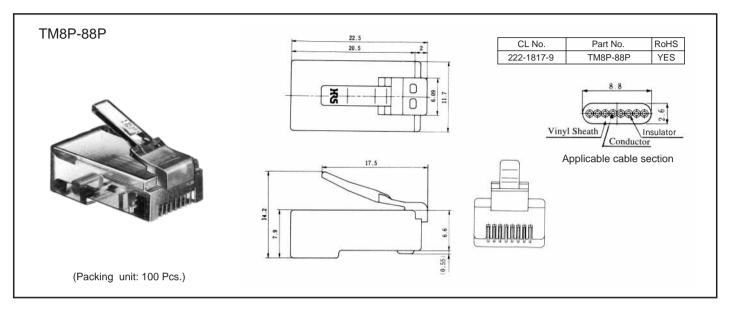

## MODULAR CONNECTORS

## CL 222 TM

### Plug for copper foil, stranded wire circular type cable


#### Material · Finish

Part name	Material	Finish
Plug case	Polycarbonate	Clear
Terminal	Phosphor Bronze	Gold plated

	Applicable Cable
Conductor diameter	Copper foil or AWG # 26
Insulator diameter	0.9- 1.0


#### **Electrical Performance**

Item	Condition	Specification
Current rating	Per pin	0.5A
Voltage rating	Per pin	125V AC
Insulation Resistance	100V DC	100 M Min.
Withstanding Voltage	1 minute	500V r.m.s AC

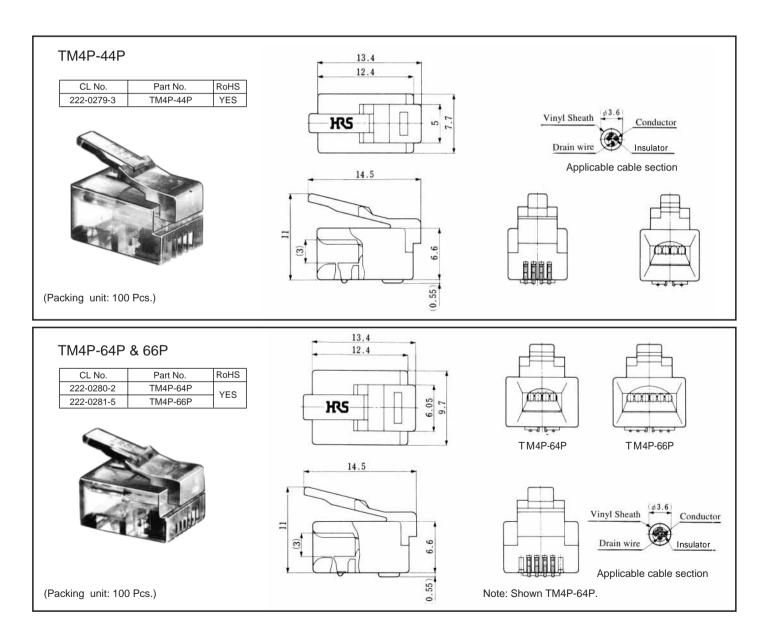

# MODULAR CONNECTORS


## CL 222 TM

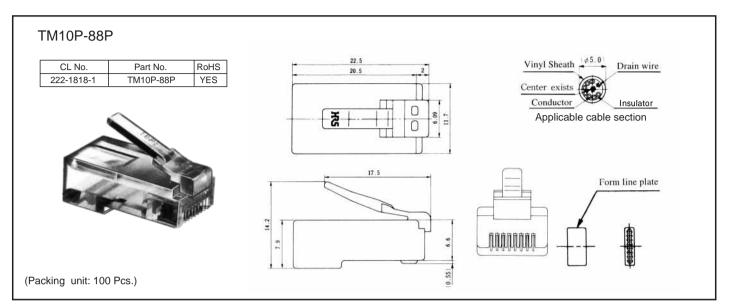

# MODULAR CONNECTORS

## CL 222 TM



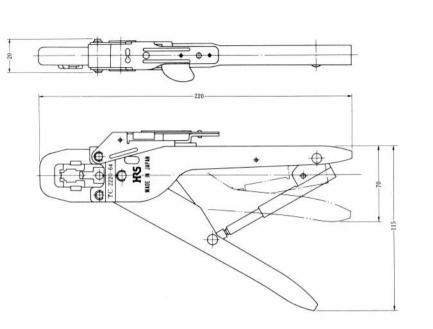

CL No.	Part No.	Applicable connector
902-0030-8-01	TC-2220-44(01)	TM3P-44P、TM4P-44P
902-0031-0-01	TC-2220-64(01)	ТМ3Р-64Р、ТМ4Р-64Р
		T M3P-62P
902-0032-3-01	TC-2220-66(01)	TM3P-66P、TM4P-66P
250-0228-1	TC-2220-8/10P-88-1	TM8P-88P、TM10P-88P
		TM10P1-88P

\* This tool is made of metal and offers rigidity and durability. The handle is equipped with a ratchet mechanism that allows the press fit height of the plate contact to be set uniformly, and also permits the prevention of insufficient clamping.

\* The tool can be used for insulation stripping of flat cables and round cables. Note that model TC-2220-66(01) is for use with flat cables only. Also note that model TC-2220-8/10P-88-1 is not equipped with an insulation stripping mechanism.

\* The cable is pulled out by the lever which permits consistent insulation stripping.

Note: Please note that depending on the specifications of the cable, there may be instances in which the insulation cannot be stripped.

When using the tool with products other than Hirose Electric modular plugs, the wiring quality cannot be guaranteed; therefore, please be sure to use Hirose Electric plugs.

Item	Part No.	CL No.	Applicable connector
Press	CM-105	901-0005-4	
Applicator	Applicator 105-TMP-44	901-0195-1	TM3P-44P、TM4P-44P
	Applicator 105-TMP-64	901-0194-9	TM3P-64P、TM4P-64P
			T M2P-62P
	Applicator 105-TMP-66	901-0193-6	TM3P-66P、TM4P-66P
	AP105-TM10P1-88P	901-2569-0	TM8P-88P、TM10P-88P

# MODULAR CONNECTORS

## CL 222 TM

### Plug for Solid Wire Cable

Material · Finish


Part name	Material	Finish
Plug case	Polycarbonate	Clear
Terminal	Phosphor Bronze	Gold plated

Арр	olicable Cable
Conductor diameter	0.4~ 0.65 *
Insulator diameter	0.96 max.

\* In case of use 0.65, not to be connected fully for 6 pins and 8 pins depend on size of insulator diameter.

#### Electrical Performance

Item	Condition	Specification
Current rating	Per pin	0.5A
Voltage rating	Per pin	30V AC
Insulation Resistance	100V DC	100 M Min.
Withstanding Voltage	1 minute	500V r.m.s AC

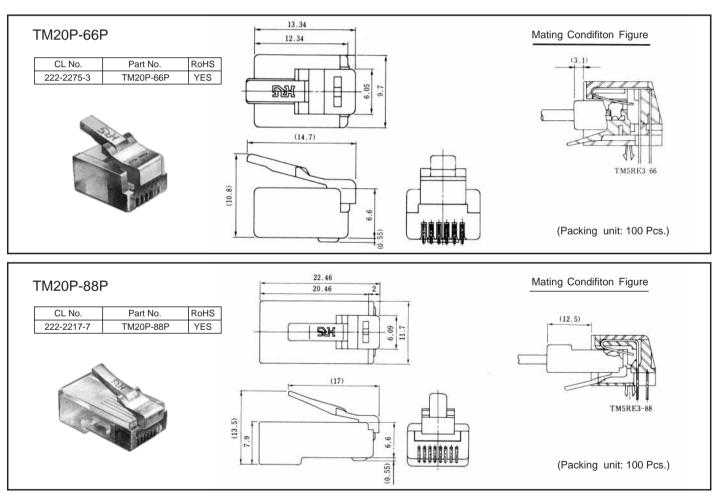

### **Exclusive Hand Tool for Connection**

All and a second			
	CL No.	Part No.	Applicable Connector
S. An	250-0240-7	TC2-TM20P-66P	TM20P-66P
	250-0241-0	TC2-TM20P/30P-88P	TM20P-88P

# MODULAR CONNECTORS

## CL 222 TM

### Plug for Thin Wire Cable


#### Material · Finish

Part name	Material		Finish
Plug case	Polycarbonate	6 Pins	Clear blue
	*	8 Pins	Clear
Terminal	Phosphor Bronze		Gold plated
			*UL94V-0

Applicable Cable	
Conductor diameter	AWG # 28( 7/0.127 )
Insulator diameter	0.787 max.

#### Electrical Performance

Item	Condition	Specification
Current rating	Per pin	0.5A
Voltage rating	Per pin	125V AC
Insulation Resistance	100V DC	100 M Min.
Withstanding Voltage	1 minute	500V r.m.s AC

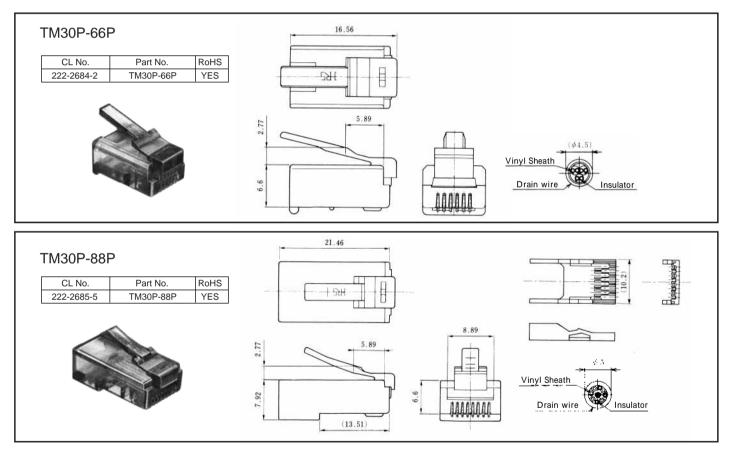

### **Exclusive Hand Tool for Connection**

